


CAN-BUS

2x2x0.75 120 Ω

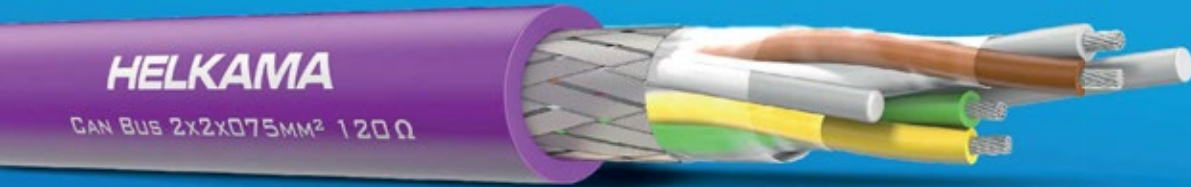

CONDUCTOR	Flexible tinned copper conductor 0,75 mm ²
INSULATION	Polyolefin insulation
CONDUCTOR IDENTIFICATION	1. White 2. Brown 3. Yellow 4. Green
CABLE LAY UP	Two cores wiring form a pair
CABLING / BEDDING	Cabling with fillers to obtain symmetrical and round construction Polyester Tape
SCREEN	Tinned copper wire braid Coverage 80%
OUTER SHEATH	LSZH
COLOUR	Violet

PHYSICAL PROPERTIES:

OPERATING TEMPERATURE RANGE	-25°C - 80°C
BENDING RADIUS	5 x outer diameter
OUTER DIAMETER	11.5+-0.3 mm
ITEM NUMBER	29995

ELECTRICAL PROPERTIES:

CHARACTERISTIC IMPEDANCE	120±12 Ω @1 MHz
OPERATING VOLTAGE	30 V
TEST VOLTAGE	1000 V

FIRE PERFORMANCE:

FLAME RETARDANT	IEC 60332-1-2 IEC 60332-3-22
HALOGEN FREE	IEC 60754 series
SMOKE EMISSION	IEC 61034
IDENTIFICATION	Printed on the sheath: Manufacturer's name, Cable size and type, Fire performance, Lot number, Manufacturing date, Meter marking